


Front View

Side View

Back View

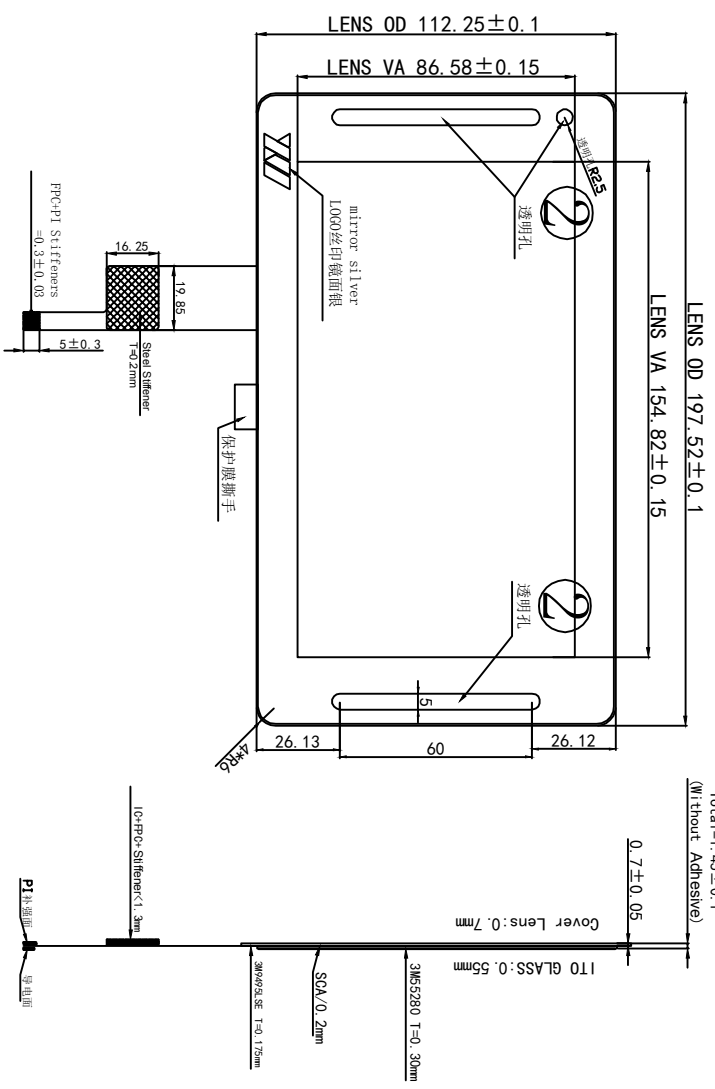

- Note:
- COVER Glass+ITO GLASS+FPC
 - COVER Glass:Asahi Dragon Trail 0.7mm
 - ITO Glass:0.55mm
 - FPC: (PINCH=0.5mm)
 - Thickness: 1.45 \pm 0.1mm
 - Drive IC:FT5446
 - Operating Voltage: 2.8V-3.3 V
 - Transmittance: $\geq 86\%$
 - Hardness: 6H
 - Operating TEMP: $-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$, $\leq 90\% \text{RH}$
 - Storage TEMP: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$, $\leq 90\% \text{RH}$
 - General Tolerance: $\pm 0.2 \text{mm}$

| Limits Unless Otherwise Noted | | 设计 | | 日期 | | 材料 | |
|-------------------------------|--------------------|----|------|----|----|----|-----|
| Grade | Tolerance Grade | 设计 | 审核 | 日期 | 日期 | 单位 | 比例 |
| 0-150 | ± 0.10 | 绘图 | 审核 | | | mm | 1:1 |
| 150+ | ± 0.20 | | 批准 | | | | |
| Angle | $\pm 0.50^{\circ}$ | | 客户确认 | | | | |

PANASYS

| PIN NO | DENIFINATION |
|--------|--------------|
| 1 | NC |
| 2 | NC |
| 3 | RST |
| 4 | GND |
| 5 | INT |
| 6 | SDA |
| 7 | SCL |
| 8 | GND |
| 9 | GND |
| 10 | VDD |

客户图号: _____
 工程图号: _____
 投影法: _____
 版本: 1.0

| Revno | Revision note | Date | Signature | Checked |
|-------|---------------|------|-----------|---------|
| | | | | |
| | | | | |
| | | | | |